

Solaris HighArc 2 Spray Pull Out 06672XX0

Available in Chrome (00), Steel Optik (86)

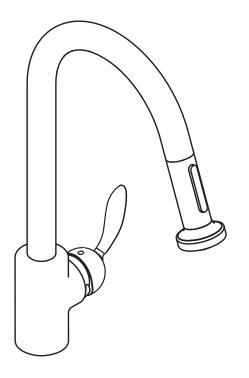



Product Specification

ADA compliant Solid brass body Spout swivels 360° Ceramic cartridge operation Flow rate 2.2 gpm Pull-out spray Two spray modes - stream and spray Protection against back siphonage provided by check valve in sprayhead Hole size in mounting surface 1 3/8" Max. mounting surface thickness 2 3/8" 3/8" supply hoses - requires stops with 3/8" compression fittings (not included)

hansgrohe